


Watertight Boards - Blank / Transparent Door

Material: ABS for Board (Thermoplastic material)
Galvanised Steel for Base Plate
Stainless Steel for Screws

Temperature Range: -25°to +60 Operating Temp.

Ingress Protection Rating: IP65

- * 650C Glow wire test for Standard type
- * 960C Glow wire test for HF type
- * Plastic Locking system
- * Enclosures design for installation of DIN rails and terminals
- * Suitable for the assembly of low voltage switchgear equipment
- * Halogen Free
- * Color RAL7035 (L.Grey)
- * Unbreakable

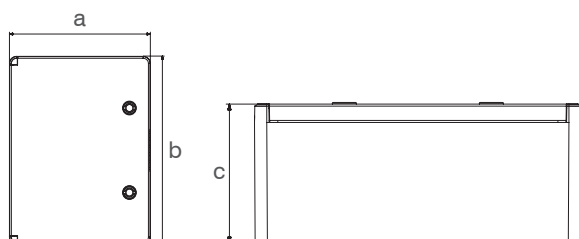

* For **Nylon Base Plate**, pls contact with Sales Team!

Code Blank Door	Code Transparent Door	Dimensions			Pack pc.
		A mm	B mm	C mm	
OAB203013	OATB203013	200	300	130	1
OAB253515	OATB253515	250	350	150	1
OAB304017	OATB304017	300	400	170	1
OAB304022	OATB304022	300	400	220	1
OAB355019	OATB355019	350	500	190	1
OAB405018	OATB405018	400	500	180	1
OAB405024	OATB405024	400	500	240	1
OAB406020	OATB406020	400	600	200	1
OAB506022	OATB506022	500	600	220	1
OAB507025	OATB507025	500	700	250	1
OAB608026	OATB608026	600	800	260	1

* All other size options available upon request...

Accessories



ON1179



ON1180



ON1181



ON1182