

PG/MetricRJ45 Cable Glands

Material: PA6 Nylon / Brass / Stainless Steel for Gland

TPV for Seal


NBR for o-ring (on request for nylon glands)

Temperature Range: -20°to +100 permanent
up to +150 intermittent

FlameReterdancy:V2 according to UL94 / V0 (on request)



- * RJ45 PG/Metric/NPT threaded nylon or metal cable glands
- * TPV sealing provide strong Cable Grip, Strain Relief and Superior Ingress Protection
- * With its unique design, provides excellent cable bending protection
- * Easy Assembly
- * Halogen Free
- * Accessories such as locknut and o-ring must be ordered separately.

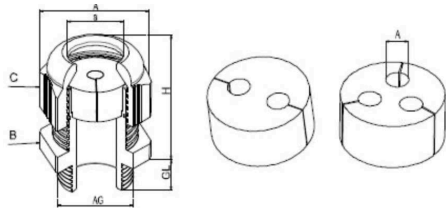

* Long thread ones (15 mm.) is supplied on request. Please add 'Long' after Part Code!

* Any other colors can be supplied as per request. Please add color name after Part Code!For example: PRJCG01-Black

* **NPT Thread available on request!**

Entry Thread Size	Light Grey RAL7035 Code	A	H	GL	Wrench
		mm	mm	mm	mm.
PG13,5	PRJCG01-L	5	29	9	24
PG16	PRJCG02-L	5	33	9	27
PG21	PRJCG03-L	5	38	11	33
PG21	PRJCG04-L	2x5	38	11	33
PG21	PRJCG05-L	3x5	38	11	33
PG29	PRJCG06-L	5	41	11	42
M20x1,5	MRJCG01-L	5	29	10	24
M20x1,5	MRJCG02-L	5	33	10	27
M25x1,5	MRJCG03-L	5	38	10	33
M25x1,5	MRJCG04-L	2x5	38	10	33
M25x1,5	MRJCG05-L	3x5	38	10	33
M32x1,5	MRJCG06-L	5	41	10	42
	Brass Code				
M20x1,5	MRJBCG01	5	26,5	8	22
M25x1,5	MRJBCG02	5	28	8	27-24
M32x1,5	MRJBCG03	5	31,5	9	34
M32x1,5	MRJBCG04	2X5	31,5	9	34
M32x1,5	MRJBCG05	3X5	31,5	9	34
M40x1,5	MRJBCG06	5	38	9	43-40