


## Slotted Cable Ducts

**Material:**PVC

**Temperature Range:** -15° to +70

- \* Nail Width: 4 / 6 mm.
- \* Color: Grey (RAL7030)
- \* Robust Design
- \* Standard: IEC60695-2-1, EN50085-2-3

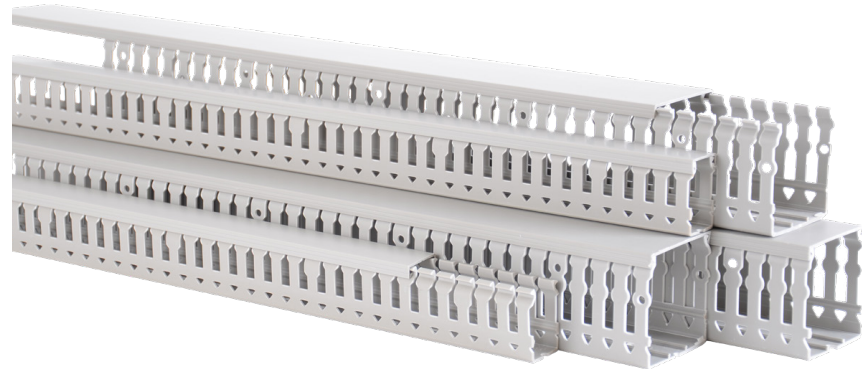

Code	Dimension mm.	Packing Unit (pc.)
OSCT2525	25x25	60x2 m.
OSCT2540	25x40	50x2 m.
OSCT2560	25x60	30x2 m.
OSCT2580	25x80	24x2 m.
OSCT2510	25x100	16x2 m.
OSCT4025	40x25	40x2 m.
OSCT4040	40x40	26x2 m.
OSCT4060	40x60	18x2 m.
OSCT4080	40x80	24x2 m.
OSCT4010	40x100	20x2 m.
OSCT6040	60x40	18x2 m.
OSCT6060	60x60	24x2 m.
OSCT6080	60x80	18x2 m.
OSCT6010	60x100	12x2 m.
OSCT8040	80x40	24x2 m.
OSCT8060	80x60	16x2 m.
OSCT8080	80x80	12x2 m.
OSCT8010	80x100	8x2 m.
OSCT1060	100x60	12x2 m.
OSCT1080	100x80	10x2 m.
OSCT1010	100x100	8x2 m.
OSCT1260	120x60	8x2 m.
OSCT1280	120x80	8x2 m.
OSCT1210	120x100	8x2 m.

\* All other size options available upon request...

\* Please add '4' for **4 mm. nail width** after Part Code!! For example: OSCT2525-4

## WIRING DUCT COVER



Code	Dimension mm.	Packing Unit (pc.)
OSCTC25	25	10x2 m.
OSCTC40	40	10x2 m.
OSCTC60	60	10x2 m.
OSCTC80	80	10x2 m.
OSCTC10	100	10x2 m.
OSCTC12	120	10x2 m.