

PG/Metric Stopper Plugs

Material: PA6 Nylon


Temperature Range: -20° to +100 permanent

Flame Retardancy: V2 according to UL94

Ingress Protection Rating: IP54 / IP68 with o-ring

* For closing unused holes

* Halogen Free

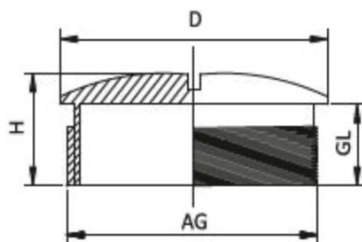

* Other colors can be supplied as per request. Please add color name after Part Code!!
For example: PSP01-Black

| Entry Thread Size | Light Grey RAL7035 Code | H | GL | D |
|-------------------|-------------------------|------|----|----|
| | | mm | mm | mm |
| PG7 | PSP01-L | 8 | 6 | 15 |
| PG9 | PSP02-L | 8,2 | 6 | 19 |
| PG11 | PSP03-L | 8,5 | 6 | 22 |
| PG13,5 | PSP04-L | 8,5 | 6 | 25 |
| PG16 | PSP05-L | 8,5 | 6 | 27 |
| PG21 | PSP06-L | 12 | 8 | 33 |
| PG29 | PSP07-L | 11,3 | 8 | 44 |
| PG36 | PSP08-L | 14,3 | 10 | 55 |
| M12x1,5 | MSP01-L | 8,5 | 6 | 15 |
| M16x1,5 | MSP02-L | 10 | 7 | 20 |
| M20x1,5 | MSP03-L | 10 | 7 | 24 |
| M25x1,5 | MSP04-L | 14 | 10 | 30 |
| M32x1,5 | MSP05-L | 14 | 10 | 37 |
| M40x1,5 | MSP06-L | 15 | 10 | 46 |