


## Coloured Cable Ties

**Material:** Polyamide (Nylon) 6.6  
**Temperature Range:** -40° to +85 Operating Temp.  
**Flame Retardancy:** UL94 HB  
**Moisture Absorption:** 2.7 % (50% relative humidity)  
**Application Areas:** Electricity Industry, Industrial Wiring, Automotive, Energy Industry, Building & Construction

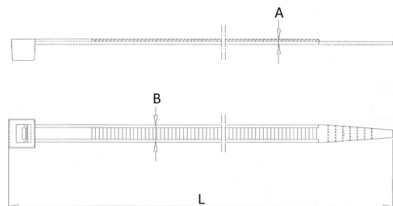

\* For other colors, please add color name after Part Code!  
 For example: OSCCT1025-BLUE

Code Yellow	Dimensions			Tighten Range (max.mm.)	Max. Tensile Strength (kg./f)	Packing Unit (Nylon bag/pc.)	Packing Unit (Box/pc.)
	L mm.	B mm.	A mm.				
OSCCT1025-Y	100	2,5	1,0	22	8	100	26.000
OSCCT1525-Y	150	2,5	1,0	35	8	100	20.000
OSCCT2025-Y	200	2,5	1,0	50	8	100	18.000
OSCCT2035-Y	100	3,5	1,2	22	18	100	12.000
OSCCT1435-Y	140	3,5	1,2	31	18	100	12.000
OSCCT2035-Y	200	3,5	1,2	50	18	100	10.000
OSCCT2535-Y	250	3,5	1,2	65	18	100	8.000
OSCCT2835-Y	280	3,5	1,2	74	18	100	8.000
OSCCT3735-Y	370	3,5	1,2	98	18	100	6.000
OSCCT2045-Y	200	4,5	1,3	50	22	100	7.000
OSCCT2545-Y	250	4,5	1,3	65	22	100	6.000
OSCCT3045-Y	300	4,5	1,3	80	22	100	5.000
OSCCT3745-Y	370	4,5	1,3	98	22	100	4.000
OSCCT4345-Y	430	4,5	1,3	120	22	100	3.000
OSCCT2075-Y	200	7,5	1,5	46	55	100	4.000
OSCCT3075-Y	300	7,5	1,5	75	55	100	3.000
OSCCT3775-Y	370	7,5	1,5	98	55	100	2.500
OSCCT4575-Y	450	7,5	1,5	120	55	100	2.000
OSCCT5575-Y	550	7,5	1,5	155	55	100	1.500
OSCCT7575-Y	750	7,5	1,5	220	55	100	1.200
OSCCT6090-Y	600	9,0	1,6	165	80	100	1.200
OSCCT7190-Y	710	9,0	1,6	205	80	100	1.200
OSCCT7690-Y	760	9,0	1,6	220	80	100	1.200
OSCCT9090-Y	900	9,0	1,6	260	80	100	1.200
OSCCT1290-Y	1200	9,0	1,6	370	80	100	1.200