



## Insulated Fork Terminals

**Material:** Copper (nickel plated)  
PVC for Insulated part  
**Temperature Range:** +105C°  
**Standard:** DIN46237



Code	Size (d2)	B	L	F	E	D	d1	Packing Unit (pc.)
IFT-132	3,2	5,8	21,0	6,3	10	4,1	1,7	200
IFT-143	4,3	6,4	20,6	6,3	10	4,1	1,7	200
IFT-153	5,3	8,0	21,0	7,0	10	4,1	1,7	200
IFT-165	6,5	12,0	27,2	11,0	10	4,1	1,7	200

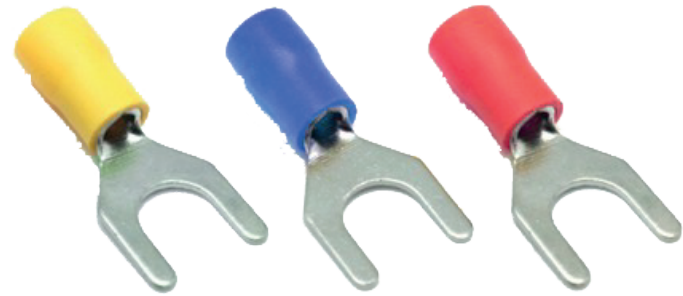

0.5 ~ 1.5 mm<sup>2</sup>  
Cable Section

IFT-232	3,2	5,8	21,0	6,3	10	4,5	2,3	200
IFT-243	4,3	6,4	21,0	6,3	10	4,5	2,3	200
IFT-253	5,3	9,5	22,0	7,2	10	4,5	2,3	200
IFT-265	6,5	12,0	27,2	11,0	10	4,5	2,3	200



1.5 ~ 2.5 mm<sup>2</sup>  
Cable Section

IFT-643	4,3	8,5	25,2	7,5	12,5	6,5	3,4	75
IFT-653	5,3	9,5	25,2	7,5	12,5	6,5	3,4	75
IFT-665	6,5	9,5	25,2	7,5	12,5	6,5	3,4	75
IFT-684	8,4	13,5	30,0	10,5	12,5	6,5	3,4	75



4.0 ~ 6.0 mm<sup>2</sup>  
Cable Section

**WE ALSO STOCK**

Other Type of Terminals  
Contact with our Sales Team!

