


Multi-Purpose Terminals


Rated Current: 32A
 Rated Voltage: 450 V
 Temperature Range: -40° to +105

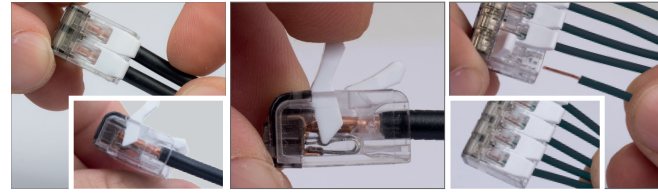

Code	Cable Section mm ²	Conductors	Packing Unit (pc.)
OMPT-2	0,14 - 4 mm ²	2	100
OMPT-3		3	100
OMPT-4		4	50
OMPT-5		5	50

Bi-Metallic Cable Lugs

Material: Al-Cu
 Tensile Grade: 110 MPa
 Temperature Range: -40° to +100



Code	Cable Section mm ²	Hole Dia.	Dimensions					Packing Unit (pc.)
			d	D	L1	L	B	
OBMCL16	16	M10	5,5	16,0	43,0	85,0	21,0	80
OBMCL25	25	M11	6,5	16,0	43,0	85,0	21,0	80
OBMCL35	35	M12	8,0	16,0	43,0	85,0	21,0	80
OBMCL50	50	M12	9,0	20,0	43,0	90,0	25,6	60
OBMCL70	70	M12	11,0	20,0	43,0	90,0	25,6	60
OBMCL95	95	M12	12,5	20,0	43,0	90,0	25,6	60
OBMCL120	120	M12	13,7	25,0	59,0	115,0	30,0	30
OBMCL150	150	M12	15,5	25,0	59,0	115,0	30,0	30
OBMCL185	185	M12	17,0	32,0	60,0	122,0	35,0	15
OBMCL240	240	M12	19,5	32,0	60,0	122,0	35,0	15
OBMCL300	300	M12	23,5	34,0	65,0	127,0	35,0	15
OBMCL400	400	M12	26,0	40,0	90,0	160,0	36,0	5