

## Steel Conduit Contractor Pack

### Technical details

- Main usage: Lighting, cable track, underfloor and industry when a high degree of mechanical protection is required
- Temp range: -30°C to +300°C
- Protection: IP40
- Standards: BSI BS EN 61386.
- 

Code	Conduit & Gland Size	Coil Length (mt.)
OSGCP16	16	10
OSGCP20	20	10
OSGCP25	25	10
OSGCP32	32	10

### Pack contents:

- 10 meter conduits
- 10 locknut's
- 10 fittings



## Flexible Galvanised Steel PVC Contractor Pack

### Technical details

- Main usage: Applications in machine tool and connections for general wiring where light mechanical stress can be obtained.
- Material: PVC, self extinguishing
- Temp range: -20°C till +80°C
- Protection: IP40

Code	Conduit & Gland Size	Coil Length (mt.)
OPSGCP16	16	10
OPSGCP20	20	10
OPSGCP25	25	10
OPSGCP32	32	10

### Pack contents:

- 10 meter conduits
- 10 locknut's
- 10 fittings





## Liquidtite Conduit Contractor Pack

### Technical details

- Main usage: All applications where machines and plant are used. Any application where acids and oils are present or where medium to high mechanical stress is needed
- Material: Galvanised steel conduit with PVC cover, self extinguishing and flame etardant
- Temp range: -15°C till +70°C
- Protection: IP67
- BS EN 61386, Crush resistance to 1250 N

Code	Conduit & Gland Size	Coil Length (mt.)
OLTSGCP16	16	10
OLTSGCP20	20	10
OLTSGCP25	25	10
OLTSGCP32	32	10

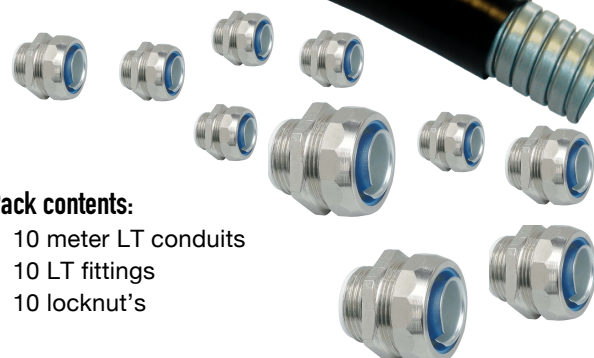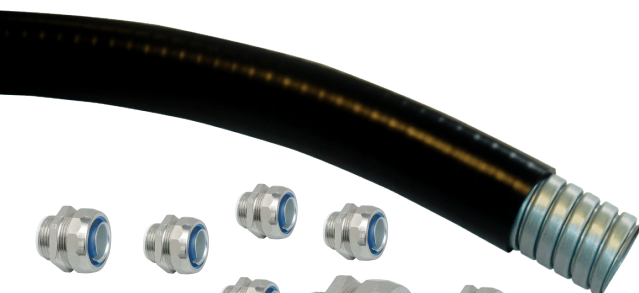

### Pack contents:

- 10 meter LT conduits
- 10 LT fittings
- 10 locknut's