


ZNB.CS.X



0-1 _____
1-0-2 _____
0-1-2 _____

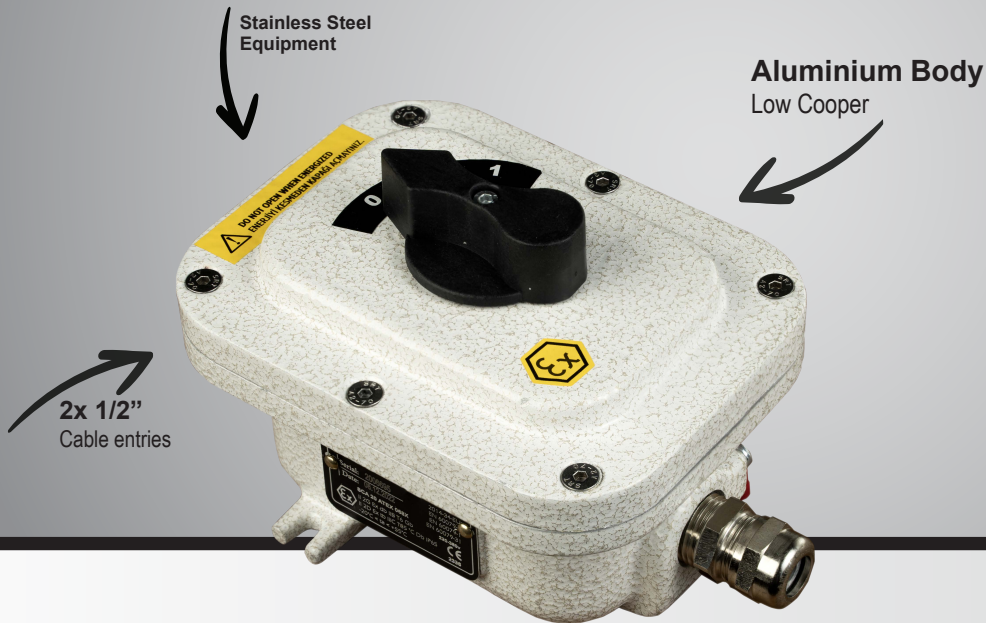



ZONE 1-2 / 21-22

IP 65

$-25\text{ }^{\circ}\text{C} < T_a < +55\text{ }^{\circ}\text{C}$

Product	Aluminium Body Switch Box
Certification	SCA 20 ATEX 068X
Marking	II 2G Ex db IIB+H ₂ T6 Gb II 2D Ex tb IIIC T85°C Db
IP	IP 65
Ambiant Temp.	-25 °C up to +55 °C
Standarts	EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014
Cable Entries	2X1/2" or 2x3/4"
Body	Low Cooper Aluminium Alloy
Gaskets	NBR o-ring on Body
Paint	Electrostatic Powder Coat
Rated Voltage	24-220V
Frequency	50/60 Hz
Application	Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

DIMENSIONAL DRAWING

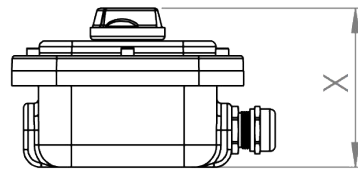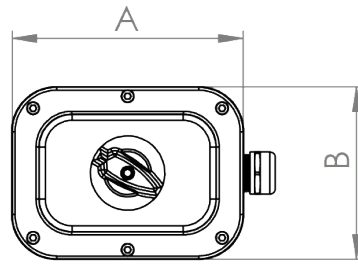

	External		Equipments	Information
	A	B	x	
ZNB.CE2.CS.M	156	116	105	0-1 Switches Monophase
ZNB.CE2.CS.T	156	116		0-1 Switches triphase
ZNB.CE2.CS.K	156	116		0-1-2 Commutator
ZNB.CE2.CS.L	156	116		0-1-2 Step Switch
ZNB.CE2.CS.P	156	116		1-0-2 Pole Changer

ZNB.CE2

See Information
Columns

