


# ZNEQ.X



- Emergency Button
- Start/Stop Button
- Signal Lamp
- Switches
- Potentiometer

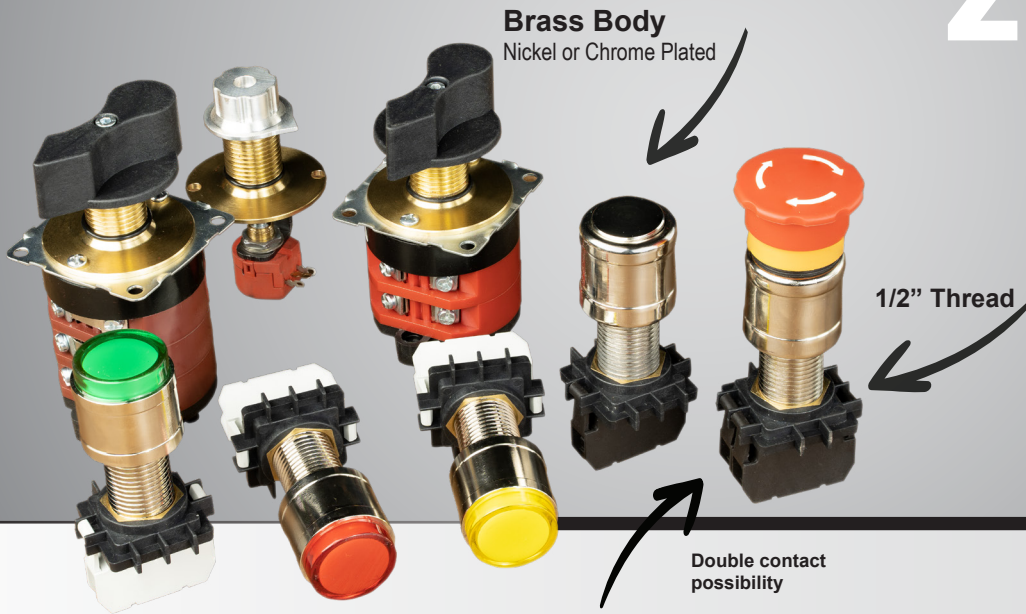


ZONE 1-2 / 21-22

IP 65

$-25\text{ }^{\circ}\text{C} < T_a < +55\text{ }^{\circ}\text{C}$

Product	Signal and Control Equipments
Certification	SCA 22 ATEX 167U
Marking	II 2 G Ex db IIB+H2 Gb III 2D Ex tb IIIC Db
IP	IP 65
Ambiant Temp.	-25 °C up to +55 °C
Standarts	EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014
Cable Entries	-
Body	Brass
Gaskets	NBR o-ring on Body
Color	Nickel or Chrome Plated
Rated Voltage	24V-380V
Frequency	50/60 Hz
Application	Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

## DIMENSIONAL DRAWING




### Start and Stop Push Button

250V , 4A

Mounting Thread: 1/2"

Double contact possibility




### Signal Lamp

24V DC , 250V , 4A

Mounting Thread: 1/2"

Led Lamp




### Potentiometer

5-10K

Mounting Thread: 1/2"

## DIMENSIONAL DRAWING




### Emergency Button

250V , 4A

Mounting Thread: 1/2"

Double contact possibility

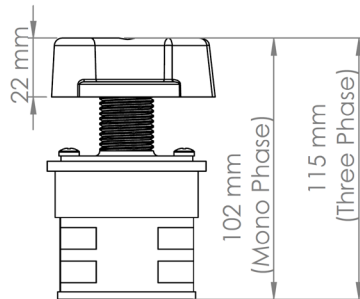

### Switches


Monophase or threephase

220V - 380V

16A-63A

Mounting Thread: 1/2"

ZNEQ  .  .

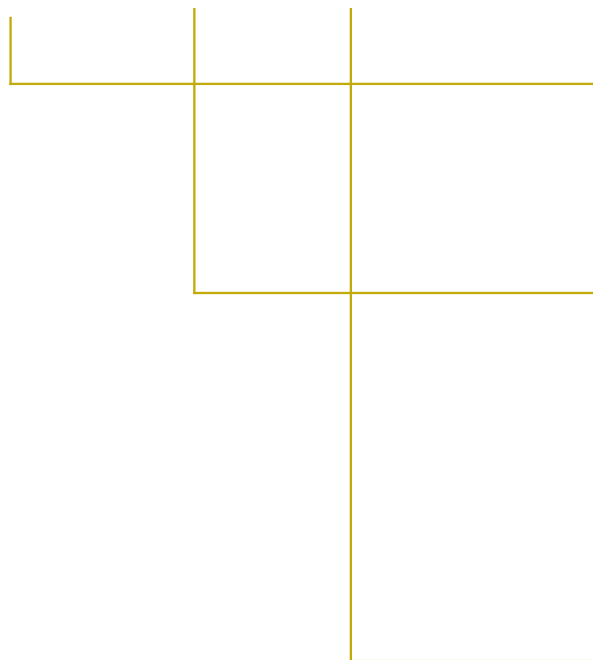

#### Type

- **01** - Start Button
- **02** - Stop Button
- **03** - Emergency Button
- **04** - Mushroom P. Button
- **05** - Signal Lamp
- **06** - Switch
- **07** - Potentiometer

#### Detail

- **R** - Red
- **G** - Green
- **Y** - Yellow
- **01** - 0-1 Switch
- **012** - 0-1-2 Switch
- **102** - 1-0-2 Switch

#### Voltage or Amper

- **24** - 24V
- **220** - 220V
- **380** - 380V
- **16A**
- **25A**
- **32A**
- **63A**