

ZNG.P

E27 Lamp
Led String Lamp





Product	Aluminium Body Globe Lamp
Certification	SCA 24 ATEX 256X
Marking	II 2G Ex db IIB T4 Gb II 2D Ex tb IIIC T135°C Db
IP	IP 66
Ambiant Temp.	-20 °C up to +40 °C
Standarts	EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014
Cable Entries	M20
Body	Low Cooper Aluminium Alloy
Difusser	Shock and high temperature tempered glass
Gaskets	Silicone oring on covers
Paint	Electrostatic Powder Coat
Circuit	E27 Lampholder, Led driver
Rated Voltage	220/240V
Frequency	47/63 Hz
Application	Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

ZONE 1-2 / 21-22

IP 66

$-20\text{ °C} < T_a < +45\text{ °C}$

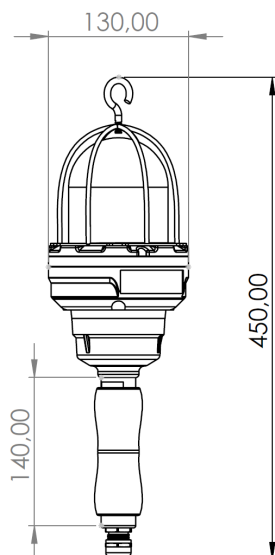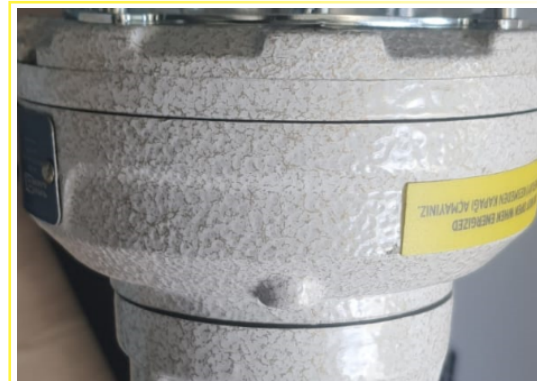

ZNG.

E - E27 Lampholder (Max.100w)
L - LED (30w Led String)

Type
P - Portable Type