


Tempered
Glass

Aluminium Body
Low Cooper

ZNK.X

Power LED

2x 1/2"
Cable entries

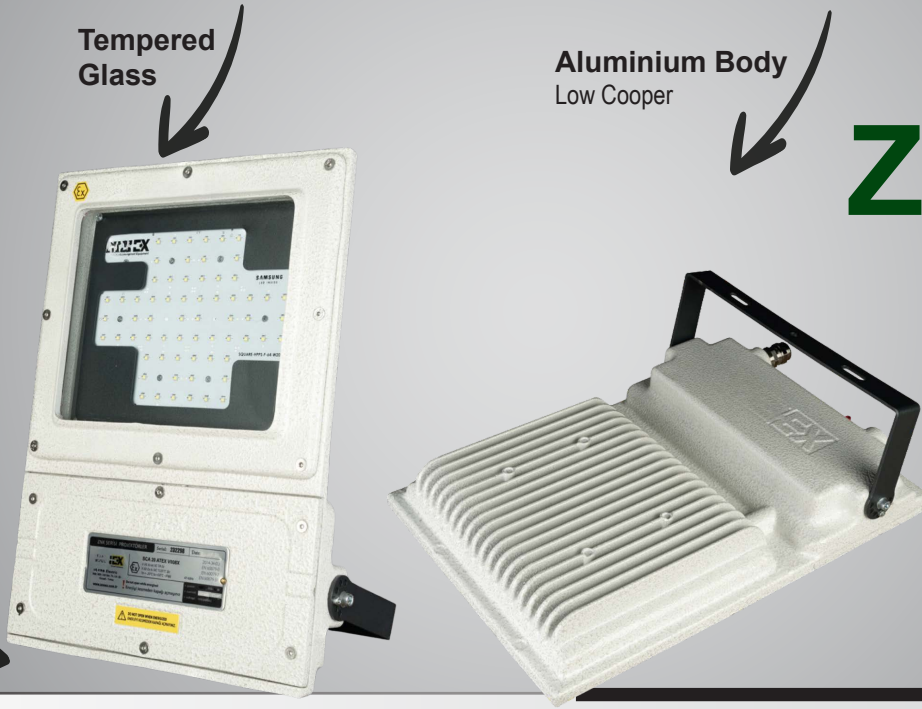

**Product
Certification
Marking**

**IP
Ambiant Temp.
Standarts
Cable Entries**

Body

Difusser

Gaskets

Paint

Circuit

Rated Voltage

Frequency

Application

Aluminium Body Led Projector

SCA 20 ATEX V008X

II 3G Ex ec IIC T4 Gc

II 3D Ex tc IIIC T100°C Dc

IP 66

-20 °C up to +50 °C

EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014

2 x 1/2"

Low Cooper Aluminium Alloy

Shock and high temperature tempered glass

NBR oring on covers and high temp. res. silicone for glass

Electrostatic Powder Coat

Meanwell Driver and Samsung/Osram Led

100-240V

47/63 Hz

Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

ZONE 2 - 22


IP 66

-20 °C < T_a < +50°C

included technology



DIMENSIONAL DRAWING

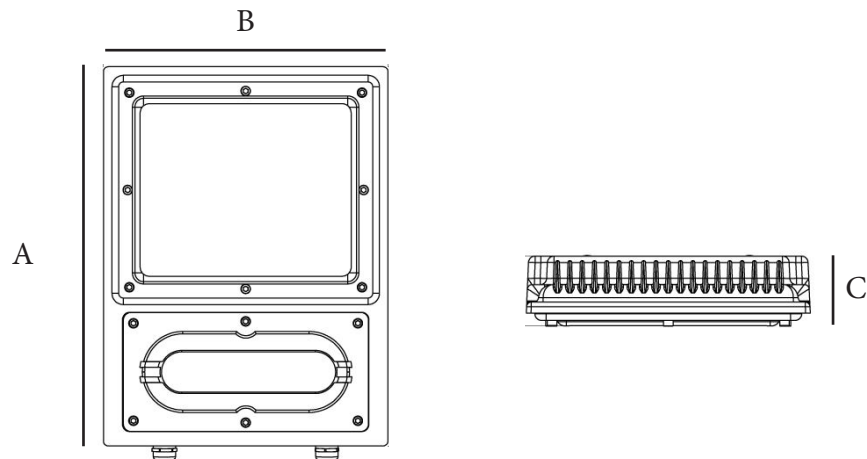

	A	B	C	Lumens	Power	weight (kg)
ZNK 35	305	205	70	~ 4800 lm	35w	5,4 kg
ZNK 50	305	205	70	~ 7040 lm	50w	5,4 kg
ZNK 75	305	205	70	~ 10400 lm	75w	5,4 kg
ZNK 100	400	300	75	~ 13500 lm	100w	9 kg
ZNK 125	400	300	75	~ 17000 lm	125w	9 kg
ZNK 150	400	300	75	~ 20500 lm	150w	9 kg
ZNK 180	400	300	75	~ 24500 lm	180w	9 kg



ZNK.

35W
50W
80W
100W
125W
150W
180W

Empty for Wall or Ceiling Bracket
P for Pendant or Pole Mounting

